


## MAGNIFIED 100x

Without  
**PROKOTE AF**

With  
**PROKOTE AF**

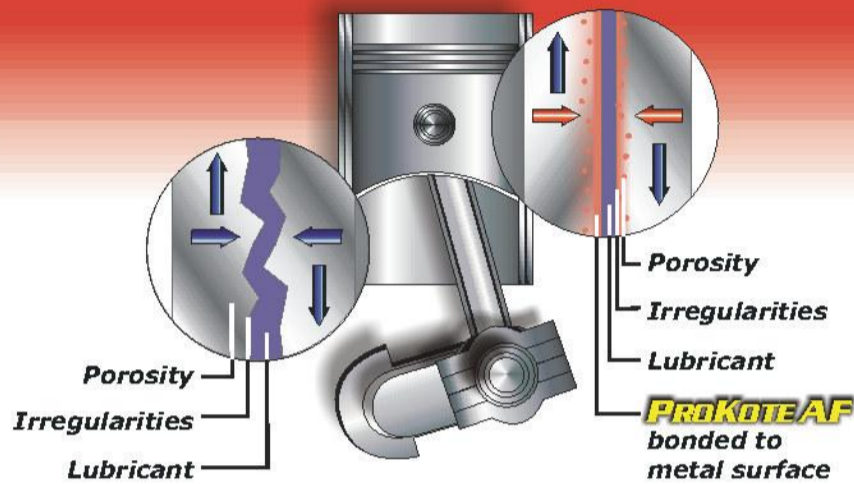

Besides its use in engines, **PROKOTE AF PREMIUM-50** may be used effectively in many other parts and components of your vehicle, such as differentials, gearboxes, manual transmissions, and much more...

# PROKOTE<sup>®</sup> AF

## PROTECTION FORMULA

### PREMIUM-50

#### How it Works

Most of the wear in an internal combustion engine is caused by the friction and heat of its moving parts. During initial start-ups the friction and wear between the metal surfaces can increase 10 times... and even more.

**PROKOTE AF PREMIUM-50** is a new-generation anti-friction synthetic lubricant that bonds to metal surfaces and stays there long after oil changes. Its properties allow it to adhere to the internal surfaces of the engine, providing a micro-thin coating that helps reduce friction far beyond the ability of regular motor oils.

#### How to Apply

**ENGINE OIL RESERVOIR:** For the treatment of your engine, add two (2) ounces of **PROKOTE AF PREMIUM-50** per quart (or liter) of oil while performing your oil change... and that's it!

**Your engine treatment will work up to 50,000 miles (or 80,000 kilometers)!**

#### Test Results

Test	Motor Oil	With <b>PROKOTE AF</b>	%
Falex EP LOAD	1250 lb	<b>4000 lb</b>	<b>+220</b>
Falex EP TORQUE	34 ft-lb	<b>75 ft-lb</b>	<b>+120</b>
Four-Ball EP WELD-POINT (ASTM D-2596)	200 Kg	<b>250 Kg</b>	<b>+ 25</b>
Four-Ball EP SCAR-WEAR (ASTM D-2266)	0.46 mm	<b>0.36 mm</b>	<b>- 22</b>

**PROKOTE AF PREMIUM-50** comes in different convenient sizes and presentations:

8 fluid ounces - 236 ml	1 gallon - 3.78 liters
16 fluid ounces - 472 ml	5 gallons - 18.9 liters
32 fluid ounces - 954 ml	55 gallons - 208 liters
64 fluid ounces - 1.91 liters	

Made in U.S.A.

**PROKOTE<sup>®</sup>**  
PROTECTION FORMULA

**PROKOTE INTERNATIONAL, Inc.**  
318 Indian Trace # 100  
Fort Lauderdale, FL 33326 - USA  
E-mail: info@prokote.net  
www.prokote.net

#### Specifications

Gravity Degrees Baumé (ASTM D-287)	~21
Boiling Point (ASTM D-2892)	>500° F (260° C)
Flash Point (ASTM D-92)	310° F (154° C)
Fire Point (ASTM D-92)	370° F (188° C)
Specific Gravity (ASTM D-287)	1.174 (H2O = 1)
Vapor Pressure (mm Hg) (ASTM D-2878)	<1
Evaporation Rate (n-Butyl Acetate = 1) (ASTM D-972, 2878 (05.02))	<0.01
Viscosity @ 100° C (cSt) (ASTM D-445)	200 - 230
Viscosity @ 40° C (cSt) (ASTM D-445)	18.0 (ISO grade)
Auto Ignition Point (ASTM D-3523/E-659)	>650° F (343° C)
Pour Point (ASTM D-97)	-40° F (-40° C)
Odor (ASTM D-1833)	Hydrocarbon
Color (ASTM D-1500)	3.0 Max. (Amber)
Density (lb/gal)	9.80 (1.17 Kg/l)